


LUMIÈRE CONFIGURATION - F

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW20X15F



On frame On graphic

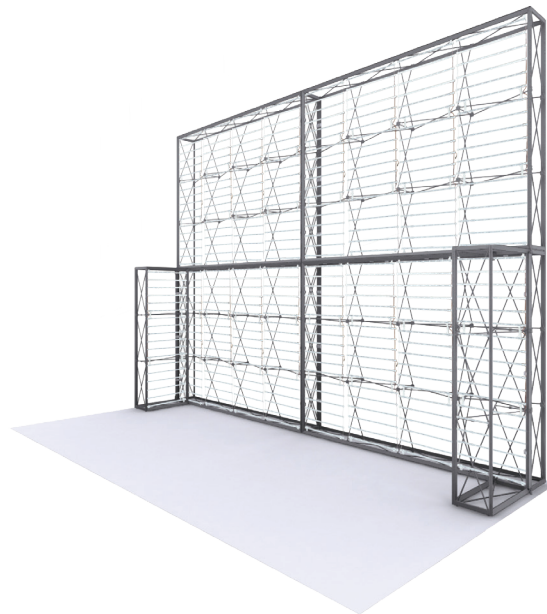

Straight Connector



L Link Connector

PRODUCT DESCRIPTION

Illuminate your message with the Lumiere Light Wall! Lumiere ladder lights make backlit graphics pop on this innovative combo display of silicone-edge graphics and portable RPL fabric pop ups. Plus, the Lumiere shrinks down in size: simply collapse the geometric frame and the SEG bungeed channel bars, and fold or roll the fabrics graphics. Setup requires 1 person and 5-10 minutes. SEG portability is easy and stylish.

DISPLAY DIMENSION	236.2" W x 177" H x 44.5" D
-------------------	-----------------------------

GRAPHIC DIMENSIONS

4X3 MAIN GRAPHICS	118.5" W x 89" H (8 Graphic)
4X3 END CAP GRAPHICS	14.25" W x 89" H (4 Graphics)
1X3 MAIN GRAPHICS	30.5" W x 89" H (4 Graphics)
1X3 END CAP GRAPHICS	14.25" W x 89" H (2 Graphics)

GRAPHIC MATERIAL

UV Backlit Fabric

GRAPHIC FINISHING

Silicone beading is sewn around the perimeter of the fabric graphic. Silicone beading is hidden from view once installed.

DISPLAY CONSTRUCTION

Aluminum Frame

LADDER LIGHTS SPECIFICATION

EACH LIGHT BEAD	0.8W
ANGLE	160°
OPERATING VOLTAGE	DC12V/24V
TOTAL WATTAGE	2332.8W
TOTAL AMPERAGE	194.4A

TRANSFORMER SPECIFICATION

OUTPUT	12V/29A
INPUT	100-120VAC/6.8A 200-240VAC/3.4A 50/60Hz

SHIPPING WEIGHTS & DIMENSIONS

Lumiere Ladder Lights (6 boxes total)

Shipping Weight	31 lbs (each box)
Shipping Dimensions	13" L x 12" W x 37" H (each box)

4x3 Lumiere Light Wall (4 boxes total)

Shipping Weight	35 lbs (frame only) (each box) 39 lbs (with graphics) (each box)
Shipping Dimensions	34" L x 14" W x 9" H (each box)

1x3 Lumiere Light Wall (2 boxes total)

Shipping Weight	20 lbs (frame only) (each box) 24 lbs (with graphics) (each box)
Shipping Dimensions	34" L x 14" W x 9" H (each box)

GRAPHIC TURN AROUND TIME

6 business days after proof approval

AVAILABILITY	CA and PA
--------------	-----------

AVAILABLE ACCESSORIES



La Caja Case



Tahoe Case



Hard Case Podium



Medium Hard Case



Half Hard Case



Genie Counter Case



Qty 4 -Stabilization Feet

LUMIÈRE CONFIGURATION - F

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW20X15F

PARTS LIST



Qty 4 - 4x3 Pop Up Frame



Qty 2 - 1x3 Pop Up Frame



Qty 16 - 4 Section
Channel Bars



Qty 24 - 3 Section
Channel Bars



Qty 8 - 1 Section
Channel Bars



Qty 24 - End Cap
Channel Bars



Qty 6 - Carry Bag




Qty 6 - Channel Bar Bag



Qty 28 - Straight
Connector



Qty 6 - L Link
Connector



Qty 18 - Ladder Lights




Qty 18 - Transformers



Qty 6 - Transformer
Power Cord



Qty 18 - Male / Female
Transformer Connector
Cords



Qty 72 - Top/Bottom
Middle Light Brackets



Qty 72 - Top/Bottom
Light Bracket

LUMIÈRE CONFIGURATION - F

LUMIÈRE LIGHT WALL


PRODUCT CODE: LLW20X15F

SET UP INSTRUCTIONS


Set Up Pop Up Frame



a. Place frame with the adjustable feet facing down.




b. Expand the frame.

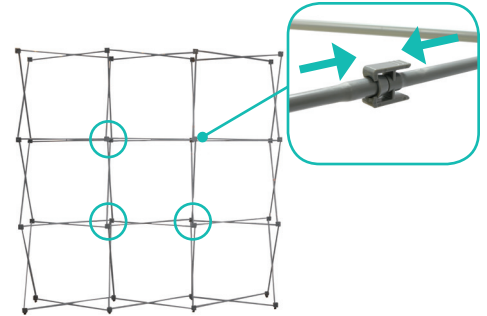


c. Close frame by pushing the outside of the frame until male and female ends connect.


Insert Channel Bars

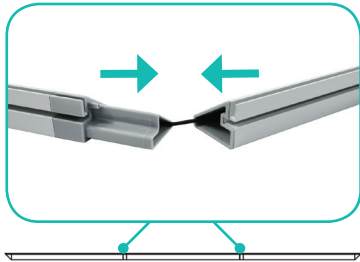

a. Expand each channel bar. Follow bungee to connect.

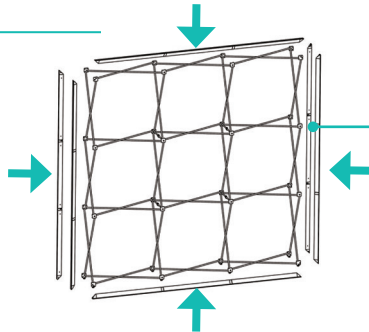

b. Attach channel bars to frame.

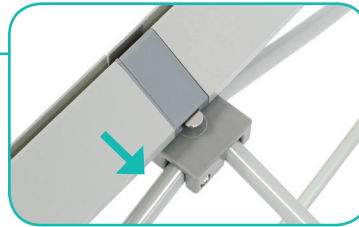

c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom end-caps on each side of the frame.


Hook Ladder Lights




a. Hang ladder lights by placing the brackets on the top and bottom of the frame.



b. Snap brackets onto ladder lights. Then place brackets on the top and bottom middle frame.

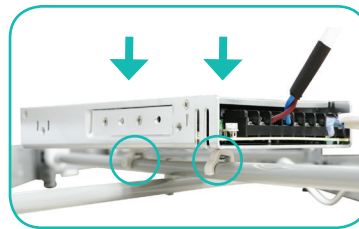

c. Place transformers on the bottom of the frame by snapping onto the cross sections.

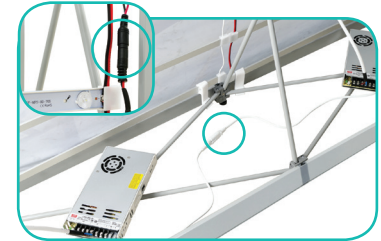

d. Connect all wire transformers and ladder lights together. Then plug each transformers together.

Install Graphic



a. In each corner, insert the silicone edge beading into the groove.



b. Then insert the remainder of the beading. Repeat backlit installation for the back frame.



c. Then repeat graphic installation on the end caps for each side.


LUMIÈRE CONFIGURATION - F

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW20X15F

SET UP INSTRUCTIONS

Connecting Wall

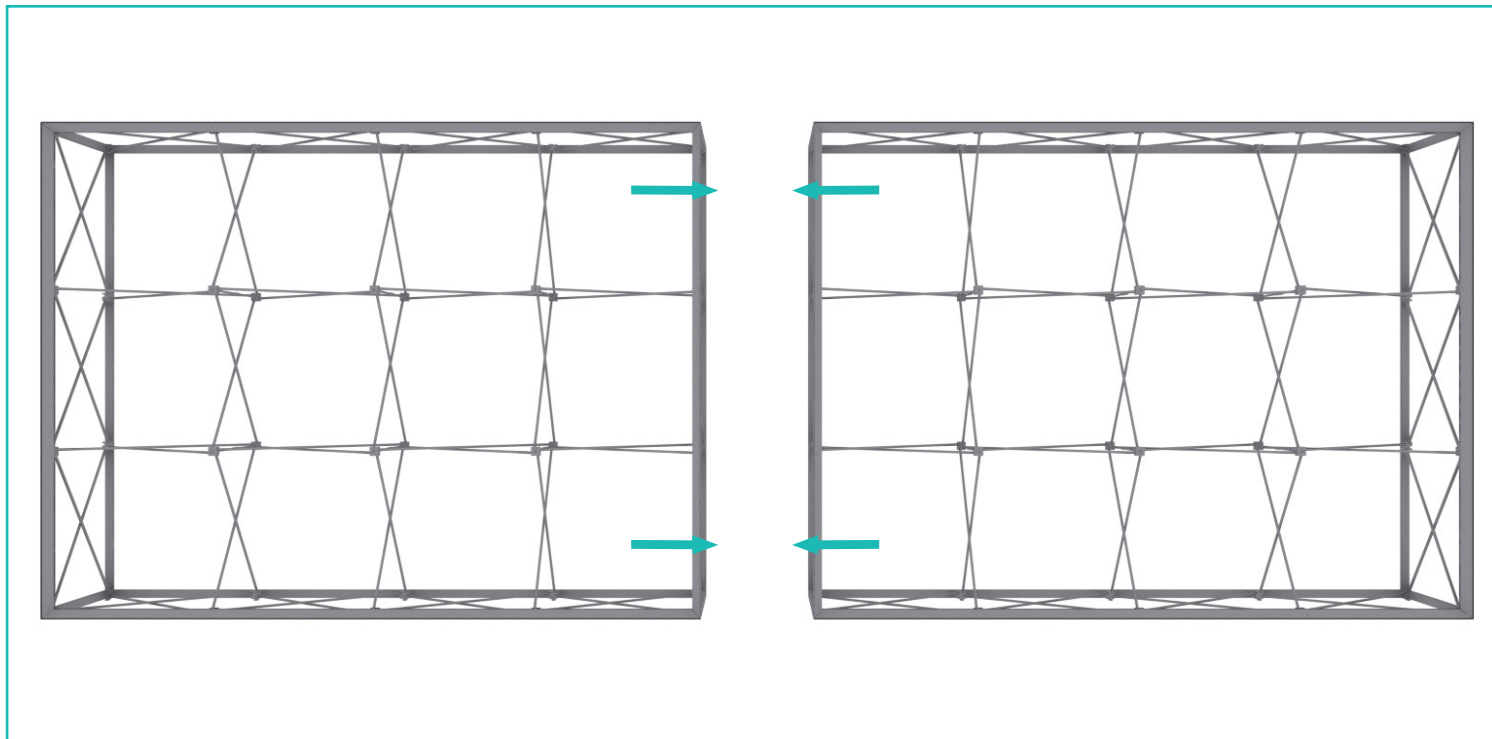


Place the (2) 4x3 frames side by side.

Note: Rendering shown without graphics for clarity.


Straight Connection



*Starting from behind, make sure the frames are flushed next to each other.

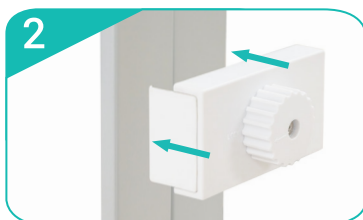


Slide Straight Connector onto the channel bars of both frames.

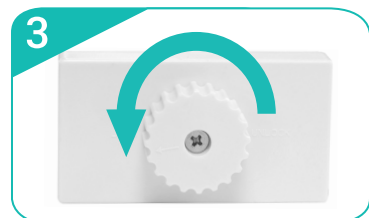

Turn dial to the left to lock the Straight Connector in place. Repeat for each vertical sections (6 total).

Note: Repeat process when frames are stack together (6 total).

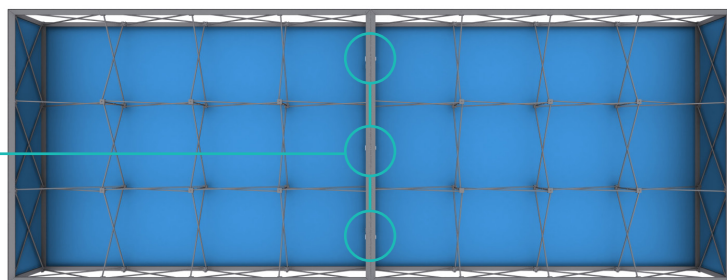

*Back side of the 4x3's shown above.



LUMIÈRE CONFIGURATION - F

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW20X15F

SET UP INSTRUCTIONS

Connecting Top Walls

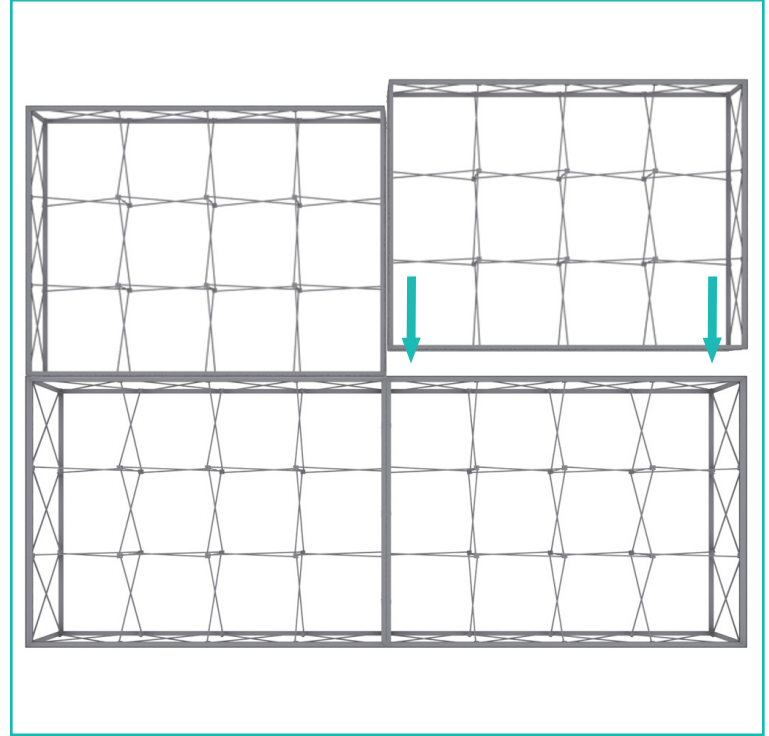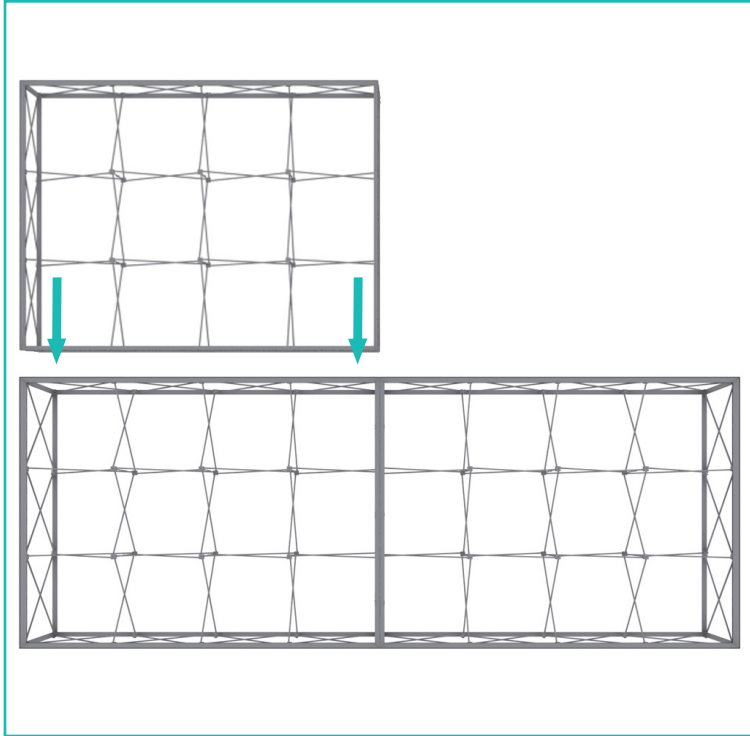

Place the 4x3 frames on top of the 4x3 frames.


Note: 2 people are required to hold each side of the top frame while the third person secures with the Straight Connectors. Repeat process for other top frame.

Note: Rendering shown without graphics for clarity. 4x3 front side graphics must be installed first before placing the frames on top.


Straight Connection




*Starting from behind, make sure the frames are flushed next to each other.

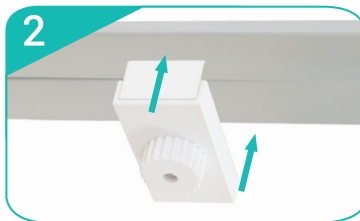

Slide Straight Connector onto the channel bars of both frames.

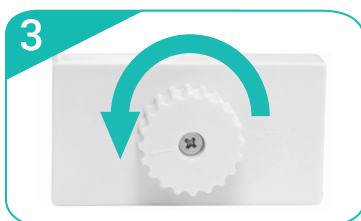

Turn dial to the left to lock the Straight Connector in place. Repeat for each vertical sections (8 total).

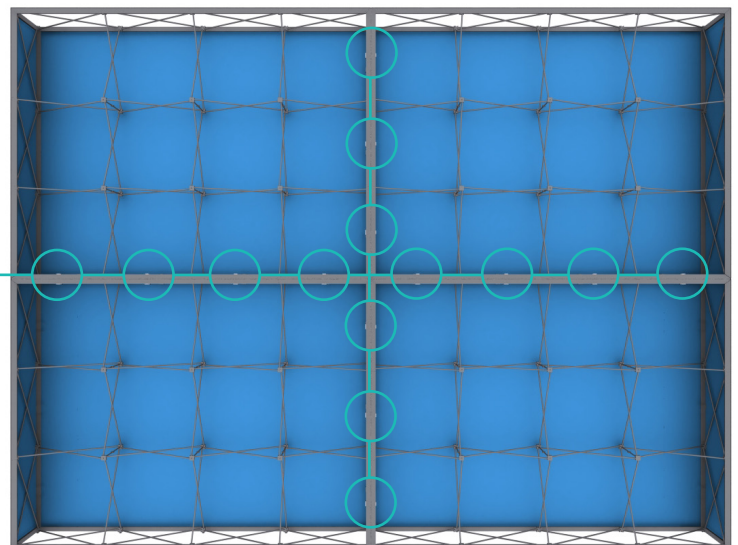

*Back side of the stacked 4x3 frames shown above.


LUMIÈRE CONFIGURATION - F

LUMIÈRE LIGHT WALL

PRODUCT CODE: LLW20X15F

SET UP INSTRUCTIONS

Connecting Return Walls

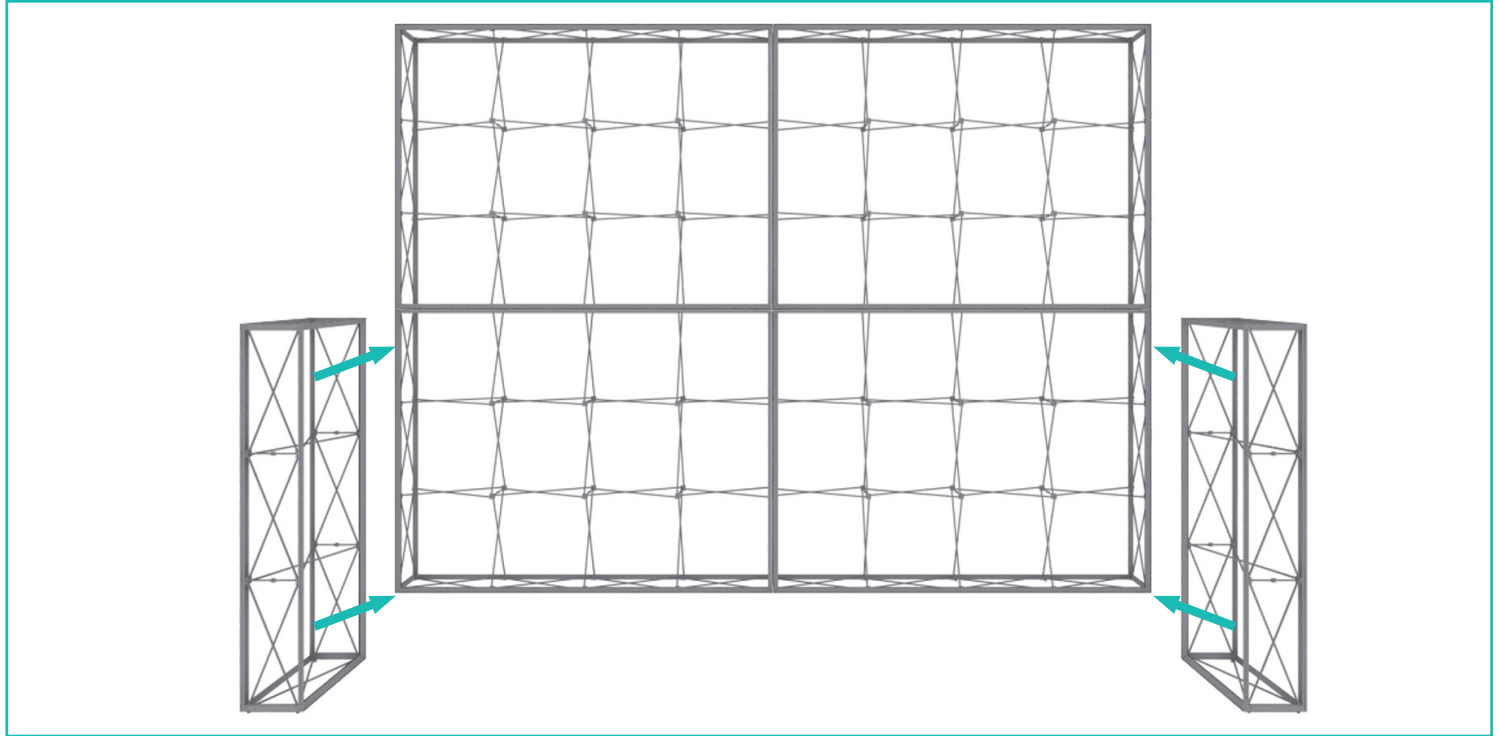

Adjoin the 1x3 frame perpendicular (90° angle) to the front side of the 4x3 frame.

Note: Rendering shown without graphics for clarity. 4x3 front side graphic must be installed before connecting frames.


L Link Connection




*Starting from behind, pull the 4x3 graphic away to make space for L Connector.



Slide L Connector onto the channel bars of both frames.

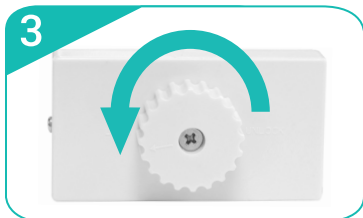

Turn dial to the left to lock the L Connector in place. Repeat for each vertical section (6 total).

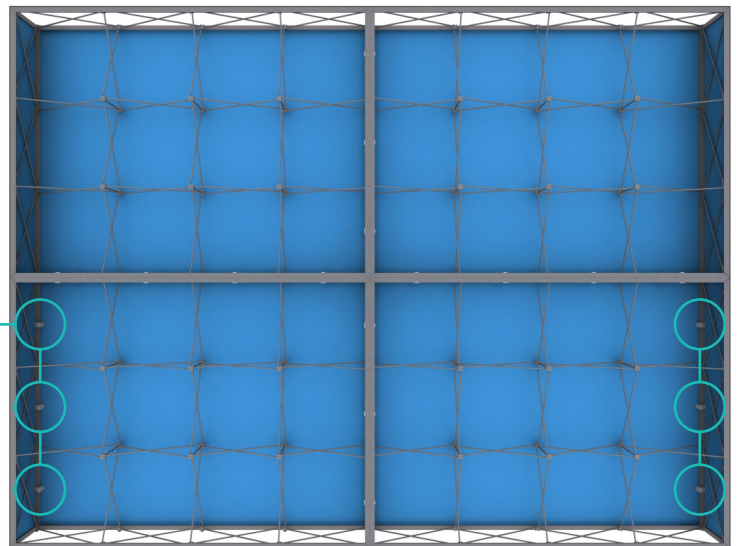


*Back side of 4x3 shown above.

LUMIÈRE CONFIGURATION - F

LUMIÈRE LIGHT WALL
PRODUCT CODE: LLW20X15F

TEMPLATE GUIDE

Front View

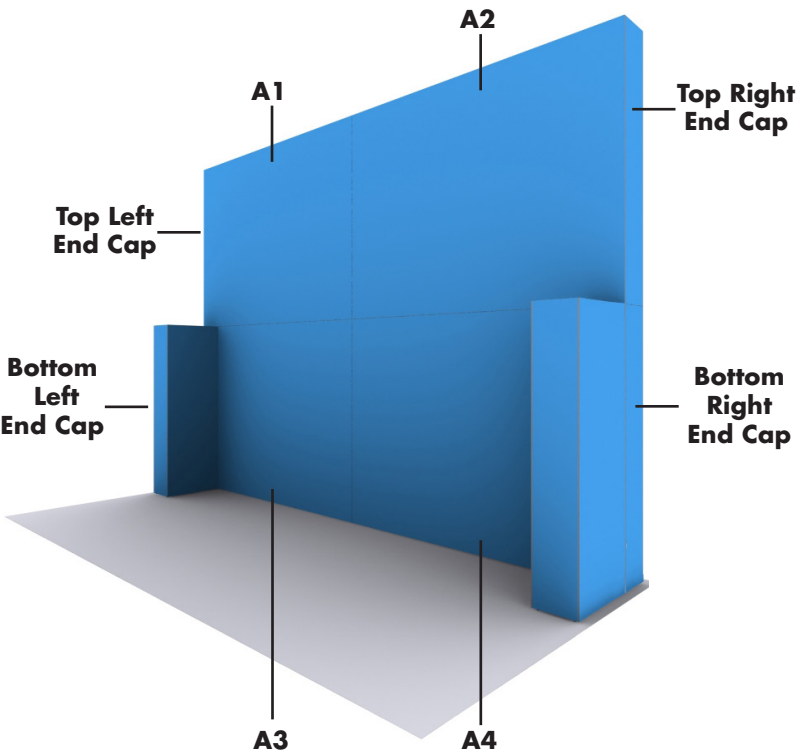


TOP LEFT END CAP	<p>A1 - LUMIERE CONFIGURATION F (4x3 TOP LEFT FRONT GRAPHIC) Non-Backlit / Backlit</p> <p>Print Size (with bleed): 118.5" x 89" Yellow Safe Area: 112.5" x 83.5" Finished Size: 117.5" x 88" End Cap Print Size (with bleed): 14.25" x 89" End Cap Yellow Safe Area: 9.5" x 83.5" Finished Size: 13.375" x 88"</p> <p>Keep all your important graphics within crop lines and outside dimensions in the yellow safe zone. Blue area will print</p> <p>DISCLAIMER: Any continuous artwork may not line up properly</p> <p>TEMPLATE ARE AT 1/2 SCALE</p>	<p>A2 - LUMIERE CONFIGURATION F (4x3 TOP RIGHT FRONT GRAPHIC) Non-Backlit / Backlit</p> <p>Print Size (with bleed): 118.5" x 89" Yellow Safe Area: 112.5" x 83.5" Finished Size: 117.5" x 88" End Cap Print Size (with bleed): 14.25" x 89" End Cap Yellow Safe Area: 9.5" x 83.5" Finished Size: 13.375" x 88"</p> <p>Keep all your important graphics within crop lines and outside dimensions in the yellow safe zone. Blue area will print</p> <p>DISCLAIMER: Any continuous artwork may not line up properly</p> <p>TEMPLATE ARE AT 1/2 SCALE</p>	TOP RIGHT END CAP
BOTTOM LEFT END CAP	<p>A3 - LUMIERE CONFIGURATION F (4x3 BOTTOM LEFT FRONT GRAPHIC) Non-Backlit / Backlit</p> <p>Print Size (with bleed): 118.5" x 89" Yellow Safe Area: 98" x 83.5" Finished Size: 117.5" x 88" End Cap Print Size (with bleed): 14.25" x 89" End Cap Yellow Safe Area: 9.5" x 83.5" Finished Size: 13.375" x 88"</p> <p>Keep all your important graphics within crop lines and outside dimensions in the yellow safe zone. Blue area will print</p> <p>DISCLAIMER: Any continuous artwork may not line up properly</p> <p>TEMPLATE ARE AT 1/2 SCALE</p>	<p>A4 - LUMIERE CONFIGURATION F (4x3 BOTTOM RIGHT FRONT GRAPHIC) Non-Backlit / Backlit</p> <p>Print Size (with bleed): 118.5" x 89" Yellow Safe Area: 98" x 83.5" Finished Size: 117.5" x 88" End Cap Print Size (with bleed): 14.25" x 89" End Cap Yellow Safe Area: 9.5" x 83.5" Finished Size: 13.375" x 88"</p> <p>Keep all your important graphics within crop lines and outside dimensions in the yellow safe zone. Blue area will print</p> <p>DISCLAIMER: Any continuous artwork may not line up properly</p> <p>TEMPLATE ARE AT 1/2 SCALE</p>	BOTTOM RIGHT END CAP

LUMIÈRE CONFIGURATION - F

LUMIÈRE LIGHT WALL
PRODUCT CODE: LLW20X15F

TEMPLATE GUIDE

Back View

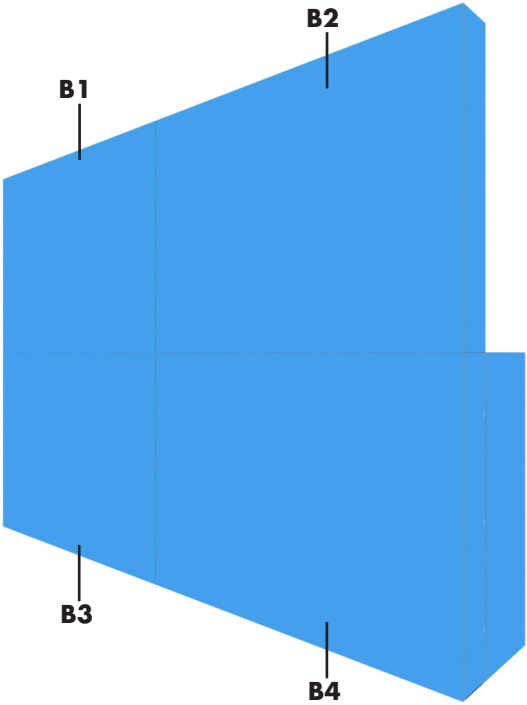

**B1 - LUMIERE
CONFIGURATION F
(4x3 TOP LEFT BACK GRAPHIC)
Non-Backlit / Backlit**

Print Size (with bleed): 118.5" x 89"
Yellow Safe Area: 112.5" x 83.5"
Finished Size: 117.5" x 88"
End Cap Print Size (with bleed): 14.25" x 89"
End Cap Yellow Safe Area: 9.5" x 83.5"
Finished Size: 13.375" x 88"

Keep all your important graphics
(such as logos, text, and contact information)
in the yellow safe zone.
Blue area will print

DISCLAIMER:
Any continuous artwork may not line up properly
TEMPLATE ARE AT 1/2 SCALE

**B2 - LUMIERE
CONFIGURATION F
(4x3 TOP RIGHT BACK GRAPHIC)
Non-Backlit / Backlit**

Print Size (with bleed): 118.5" x 89"
Yellow Safe Area: 112.5" x 83.5"
Finished Size: 117.5" x 88"
End Cap Print Size (with bleed): 14.25" x 89"
End Cap Yellow Safe Area: 9.5" x 83.5"
Finished Size: 13.375" x 88"

Keep all your important graphics
(such as logos, text, and contact information)
in the yellow safe zone.
Blue area will print

DISCLAIMER:
Any continuous artwork may not line up properly
TEMPLATE ARE AT 1/2 SCALE

**B3 - LUMIERE
CONFIGURATION F
(4x3 BOTTOM LEFT BACK GRAPHIC)
Non-Backlit / Backlit**

Print Size (with bleed): 118.5" x 89"
Yellow Safe Area: 112.5" x 83.5"
Finished Size: 117.5" x 88"
End Cap Print Size (with bleed): 14.25" x 89"
End Cap Yellow Safe Area: 9.5" x 83.5"
Finished Size: 13.375" x 88"

Keep all your important graphics
(such as logos, text, and contact information)
in the yellow safe zone.
Blue area will print

DISCLAIMER:
Any continuous artwork may not line up properly
TEMPLATE ARE AT 1/2 SCALE

**B4 - LUMIERE
CONFIGURATION F
(4x3 BOTTOM RIGHT BACK GRAPHIC)
Non-Backlit / Backlit**

Print Size (with bleed): 118.5" x 89"
Yellow Safe Area: 112.5" x 83.5"
Finished Size: 117.5" x 88"
End Cap Print Size (with bleed): 14.25" x 89"
End Cap Yellow Safe Area: 9.5" x 83.5"
Finished Size: 13.375" x 88"

Keep all your important graphics
(such as logos, text, and contact information)
in the yellow safe zone.
Blue area will print


DISCLAIMER:
Any continuous artwork may not line up properly
TEMPLATE ARE AT 1/2 SCALE

LUMIÈRE CONFIGURATION - F

LUMIÈRE LIGHT WALL
PRODUCT CODE: LLW20X15F

TEMPLATE GUIDE

Front View

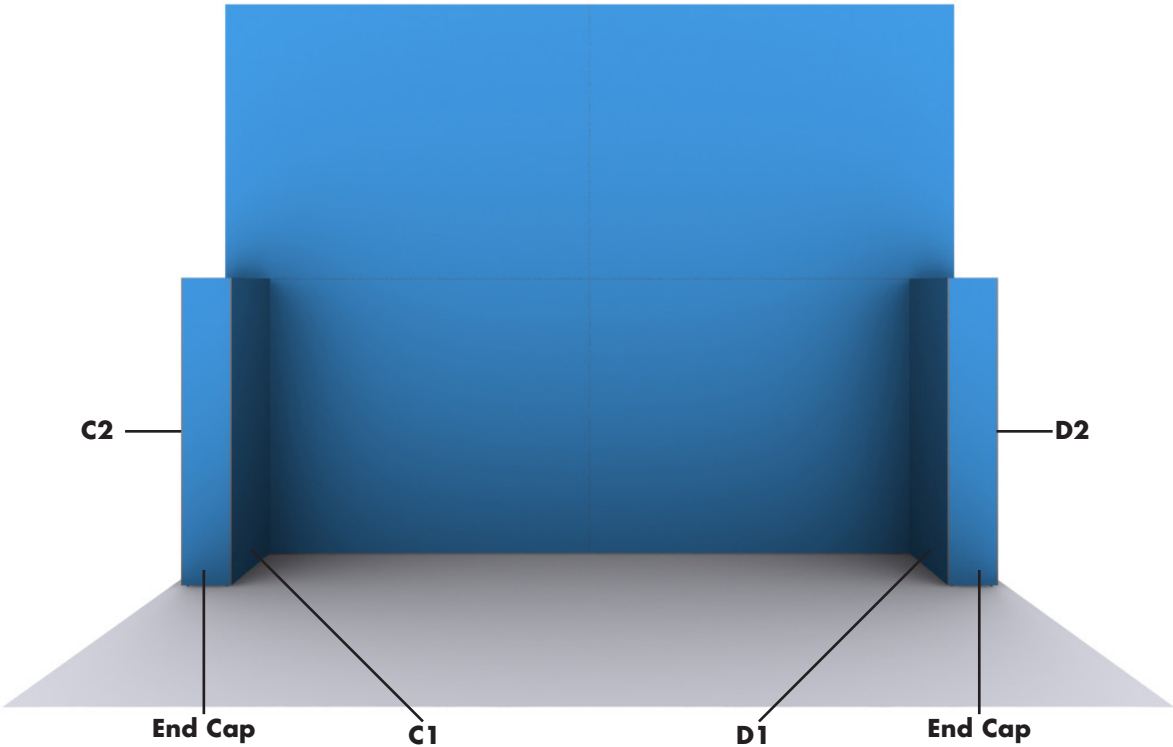

C2 - LUMIERE CONFIGURATION F (1x3 LEFT RETURN WALL GRAPHIC) Non-Backlit / Backlit

Print Size (with bleed): 31.5" x 89"
Yellow Safe Area: 25.5" x 83.5"
Finished Size: 30.5" x 88"
End Cap Print Size (with bleed): 14.25" x 89"
End Cap Yellow Safe Area: 9.5" x 83.5"
End Cap Finished Size: 13.375" x 88"

Keep all your important graphics such as logos, text, and contact information in the yellow safe zone.
Blue area will print

DISCLAIMER:
Any continuous artwork may not line up properly

TEMPLATE ARE AT 1/2 SCALE

END CAP

C1 - LUMIERE CONFIGURATION F (1x3 LEFT RETURN WALL GRAPHIC) Non-Backlit / Backlit

Print Size (with bleed): 31.5" x 89"
Yellow Safe Area: 25.5" x 83.5"
Finished Size: 30.5" x 88"
End Cap Print Size (with bleed): 14.25" x 89"
End Cap Yellow Safe Area: 9.5" x 83.5"
End Cap Finished Size: 13.375" x 88"

Keep all your important graphics such as logos, text, and contact information in the yellow safe zone.
Blue area will print

DISCLAIMER:
Any continuous artwork may not line up properly

TEMPLATE ARE AT 1/2 SCALE

Ver-1011.17

D1 - LUMIERE CONFIGURATION F (1x3 RIGHT RETURN WALL GRAPHIC) Non-Backlit / Backlit

Print Size (with bleed): 31.5" x 89"
Yellow Safe Area: 25.5" x 83.5"
Finished Size: 30.5" x 88"
End Cap Print Size (with bleed): 14.25" x 89"
End Cap Yellow Safe Area: 9.5" x 83.5"
End Cap Finished Size: 13.375" x 88"

Keep all your important graphics such as logos, text, and contact information in the yellow safe zone.
Blue area will print

DISCLAIMER:
Any continuous artwork may not line up properly

TEMPLATE ARE AT 1/2 SCALE

END CAP

D2 - LUMIERE CONFIGURATION F (1x3 RIGHT RETURN WALL GRAPHIC) Non-Backlit / Backlit

Print Size (with bleed): 31.5" x 89"
Yellow Safe Area: 25.5" x 83.5"
Finished Size: 30.5" x 88"
End Cap Print Size (with bleed): 14.25" x 89"
End Cap Yellow Safe Area: 9.5" x 83.5"
End Cap Finished Size: 13.375" x 88"

Keep all your important graphics such as logos, text, and contact information in the yellow safe zone.
Blue area will print

DISCLAIMER:
Any continuous artwork may not line up properly

TEMPLATE ARE AT 1/2 SCALE

Ver-1011.17