6" heig

FS OR-G-PR6

49" width

Polaris
10' x 20' Truss System
UV Printed

TEMPLATE IS @ 1/2 SCALE
Panels PR1 and PR5:
Total Graphic Area: 50"w x 84.75"h
Finished Size: 49"w x 83.75"h

Panel PR2 and PR4:
Total Graphic Area: 48.75"w x 84.75"h
Finished Size: 47.75"w x 83.75"h

Panel PR3:
Total Graphic Area: 50.75"w x 84.75"h
Finished Size: 49.75"w x 83.75"h

Panel PR6:
Total Graphic Area: 95.5"w x 7"h
Finished Size: 94.5"w x 6"h

Template requires 1/4" bleed around the perimeter (1/2" around the perimeter when scaled to 200% and printed)

FS = Graphic is front side mounted (3/4" w magnet is applied to the back of the panel)
BS = Graphic is back side mounted (3/4" w velcro is applied to the front of the panel)
Notching = 7/8" square that is cut into the appropriate location.
Hinging= 3/4" strip of material that is cropped from the panel and reapplied with hinge tape. Allows two graphics to share the same extrusion corner.

General Art Guidelines:

- CMYK Color Mode
- All Solid Coated Pantone colors should be called out in the art as spot colors
- Embed all images and support files
- Resolution must be 200-240 ppi @ 1/2 size, 100-120ppi @ 100% size
- All fonts must be created to outlines
- Do not scale artboard
- Background color/images must bleed to the edge of artboard
- Do not use spot colors from template in your artwork as they will not print

BS
OR-G-PR1

bleed area
trim line

47.75" width

BS
OR-G-PR2

49.75" width

BS
OR-G-PR3

47.75" width

BS
OR-G-PR4

49" width

BS
OR-G-PR5

gray area will be obstructed once finished and mounted

Polaris
10’ x 20’ Truss System
UV Printed

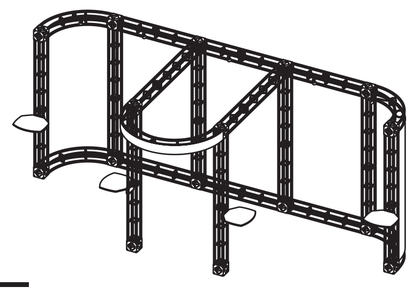

TEMPLATE IS @ 1/2 SCALE
Panels PR1 and PR5:
Total Graphic Area: 50”w x 84.75”h
Finished Size: 49“w x 83.75”h

Panel PR2 and PR4:
Total Graphic Area: 48.75”w x 84.75”h
Finished Size: 47.75“w x 83.75”h

Panel PR3:
Total Graphic Area: 50.75”w x 84.75”h
Finished Size: 49.75“w x 83.75”h

Panel PR6:
Total Graphic Area: 95.5”w x 7”h
Finished Size: 94.5“w x 6”h

Template requires 1/4” bleed around the perimeter (1/2” around the perimeter when scaled to 200% and printed)

FS = Graphic is front side mounted (3/4“ w magnet is applied to the back of the panel)
BS = Graphic is back side mounted (3/4“ w velcro is applied to the front of the panel)
Notching = 7/8” square that is cut into the appropriate location.
Hinging= 3/4” strip of material that is cropped from the panel and reapplied with hinge tape. Allows two graphics to share the same extrusion corner.

General Art Guidelines:

- CMYK Color Mode
- All Solid Coated Pantone colors should be called out in the art as spot colors
- Embed all images and support files
- Resolution must be 200-240 ppi @ 1/2 size, 100-120ppi @ 100% size
- All fonts must be created to outlines
- Do not scale artboard
- Background color/images must bleed to the edge of artboard
- Do not use spot colors from template in your artwork as they will not print

BS
OR-G-PR1

— bleed area
— trim line

BS

OR-G-PR2

BS

OR-G-PR3

BS

OR-G-PR4

BS

OR-G-PR5

gray area will
be obstructed
once finished
and mounted

FS OR-G-PR6