
LUMIÈRE CONFIGURATION H (BACKLIT)

PRODUCT CODE: LLWHNLG



On frame On graphic



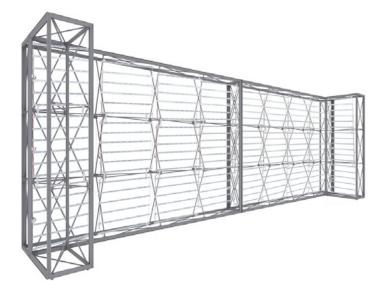



L Link Connector



Straight Connector

PRODUCT DESCRIPTION

Introducing the Lumiere Light Wall! A combination of innovative silicone-edge graphics and RPL fabric pop ups offers an easier and more cost effective SEG option. This SEG style display has the depth of the RPL so you can expose more of your message using endcap graphics. The Lumiere shrinks down in size - simply collapse the geometric frame and the SEG bungeed channel ha all the fabric graphice. Ecture


bars, and fold or roll the fabric graphics. Setup can be done by 1 person and in 5-10 minutes. SEG portability is easy and stylish.	
DISPLAY DIMENSION	236"W x 89"H x 44.5"D
GRAPHIC DIMENSIONS	4x3: 117.5"W x 88"H Qty.4 1x3: 30.5"W x 88"H Qty.2 1x3/Endcaps: 43"W x 88"H Qty.2 Endcaps: 13.375"W x 88"H Qty.2
GRAPHIC MATERIAL	
Backlit Fabric	
GRAPHIC FINISHING	
SEG Finishing (Silicone Edge Graphic)	
DISPLAY CONSTRUCTION	
Aluminum Frame	
LADDER LIGHT SPECIFICATION	
EACH LIGHT BEAD	0.8W
ANGLE	160°
OPERATION VOLTAGE	DC12V/24V
TOTAL WATTAGE	2332.8W
TOTAL AMPERAGE	194.4A
TRANSFORMER SPECIFICATION	
OUTPUT	12V/29A
INPUT	100-120VAC/6.8A 200-240VAC/3.4A 50/60Hz
SHIPPING WEIGHTS & DIMENSIONS	
Shipping Weight (9 boxes)	Qty.2 - 1x3: 18lbs (frame only) 26lbs (with graphics) Qty.2 - 4x3: 32lbs (frame only)
	40lbs (with graphics) Qty.5 - 4 Light Sets: 32lbs each
Shipping Dimensions (9 boxes)	Qty.2 - 34"L x 14"W x 9"H Qty.2 - 29.75"L x 22"W x 22"H Qty.5 - 29.75"L x 5.5"W x 5.5"H
GRAPHIC TURN AROUND TIME	
3 business days after proof approval	
AVAILABLE ACCESSORIES	
Lumiere LED Lights 150w (Black & Silver)	Lumiere Front Lit LED Lights (Black & Silver)

Lumiere LED Lights 150w (Black & Silver)	Lumiere Front Lit LED Lights (Black & Silver)
T135 LED Light	La Caja Case
Tahoe Case	
AVAILABILITY CA and PA	

LUMIÈRE CONFIGURATION H (BACKLIT)

PRODUCT CODE: LLWHNLG



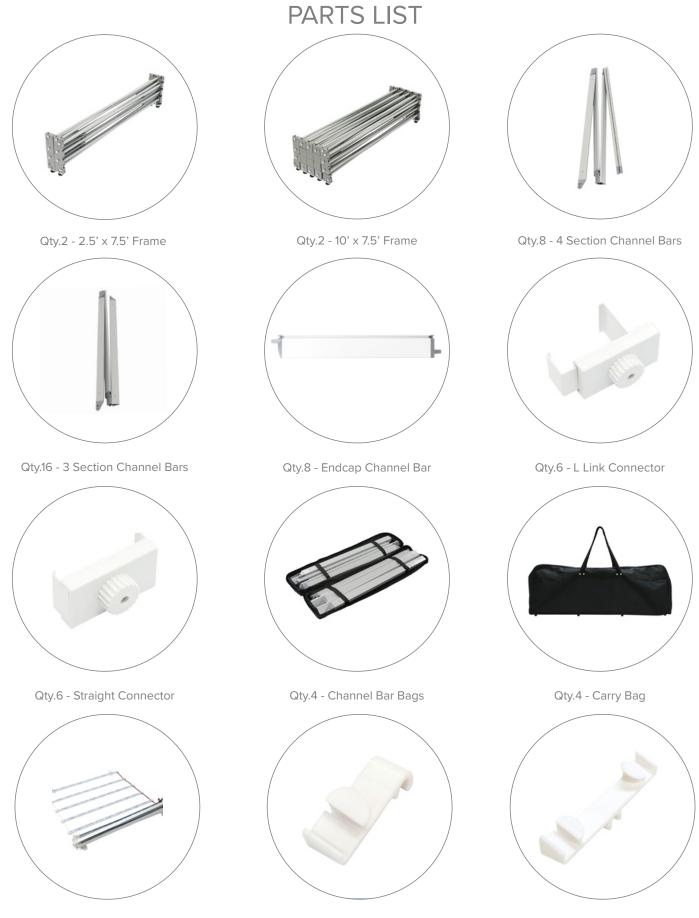

Qty.10 - Ladder Lights

Qty.40 - Top/Bottom Brackets

Qty.20 - Middle Brackets



ACCESSORIES



La Caja Case





150w Black Light



150w Silver Light





Tahoe Case

Front Lit LED Black Light



Front Lit LED Silver Light

T135 LED Light




SET UP INSTRUCTIONS


Set Up Pop Up Frame



a. Place frame with the adjustable feet facing down.


Insert Channel Bars






a. Expand each channel bar. Follow bungee to connect.


b. Attach channel bars to frame.



b. Expand the frame.



c. Close frame by pushing the outside of the frame until male and female ends connect.



c. Slide channels bars onto frame, from top to bottom, then secure onto metal peg.



d. Attach the top and bottom endcaps on each side of the frame.


Install Graphic



a. In each corner, insert the silicone edge beading into the groove.

Optional Accessories

Light Bracket:

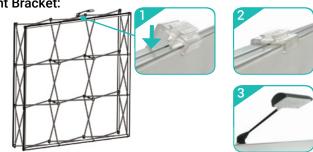


a. Snap the LED Light Bracket on top of the frame. Then slide the LED Light onto the bracket.



b. Then insert the remainder of the beading.



c. Repeat graphic installation on the end caps.

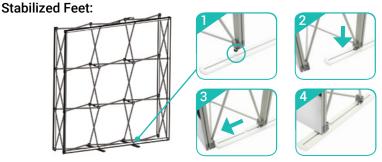


a. From the back, lift frame and insert adjustable feet onto stabilized feet. Then slide stabilized feet toward and insert onto the adjustable feet.




Step 1

Step 2

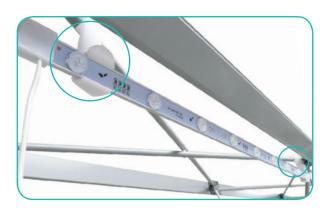


a. Hang ladder lights by placing the brackets on the top and bottom of the frame.


Step 3

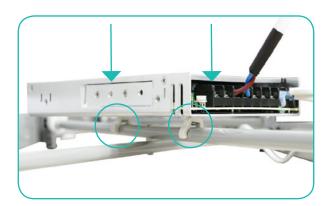

c. Place two transformers on the bottom of the frame by snapping onto each cross sections.

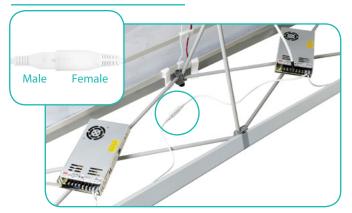


e. Plug each transformers together by connecting male and female connector cords.

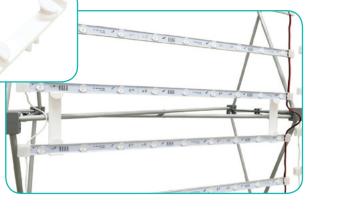


b. Snap brackets onto the ladder lights on each side. Then place brackets on the top and bottom middle cross sections of the frame.

Step 4

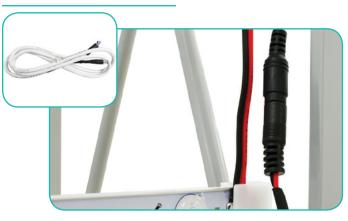

d. Connect transformer cord and ladder light cord together.

Step 6

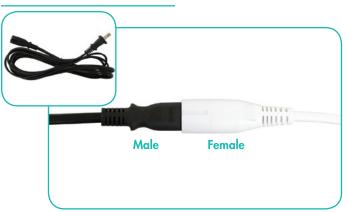

f. Then connect male power cord and female transformer connector cord together.

Step 5




SET UP INSTRUCTIONS

(CONFIGURATION H)

L Link Connection (Return Wall)

Adjoin the 1x3 frame(s) to the front of the 4x3 frame(s). Starting from behind, pull the 4x3 graphic away to make space for the L Connector. Place the L Connector onto the channel bars of both frames. Turn the dial to the left to lock the L Connector into place. Repeat for each vertical section (3 total).

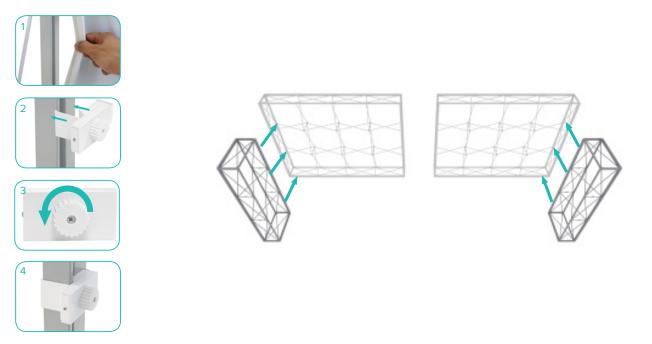

Straight Connection (Side Extension)

Adjoin both 4x4 frames, side by side. Place a straight connector directly in the middle (outside channel bar of each frame) of both frames. Turn the dial to the left to lock in place. Repeat for front and back vertical sections (6 total).

