hybrid pro rental kit

Hybrid Pro Modular Kit 12

Files at 25% of actual scale
Dye Sub Graphic Panels A and O
Total Graphic Area: 39.3125"w x 39.3125"h
Finished Graphic Area: 35.3125"w x 35.3125"h

Dye Sub Graphic Panel B and P
Total Graphic Area: 39.3125"w x 39.3125"h
Finished Graphic Area: 35.3125"w x 35.3125"h
(Graphic has corner obstruction)

UV Graphic: C, D, G, H, I, J, N, M (6mm Sintra)
Total Graphic Area: 8.87"w x 43.62"h
Finished Graphic Area: 7.87"w x 42.62"h
Viewable area: 5.875"w x 42.62"h

Dye Sub Graphic Panel E and K
Total Graphic Area: 98.375"w x 98.375"h
Finished Graphic Area: 94.375"w x 94.375"h

Dye Sub Fabric Structure F and L (sheer)
Total Graphic Area: 115"w x 43"h
Finished Graphic Area: 111"w x 39"h.

Please be sure to include a 2" bleed
around the perimeter of panels A, B, E, K, P, O.

Please be sure to include a .5" bleed
around the perimeter of panels C,D,G, H, I, J, M, N.

Please consider obstructions and spaces
created by the extrusions when designing
your graphics.
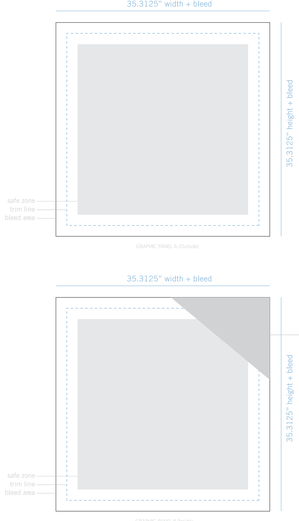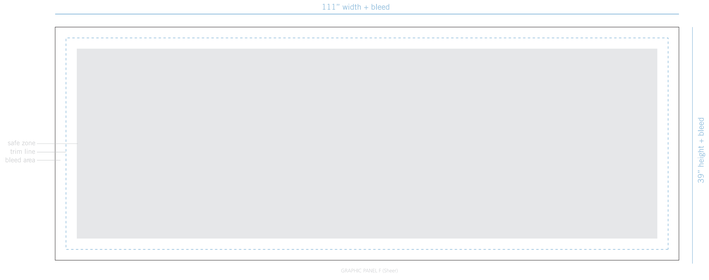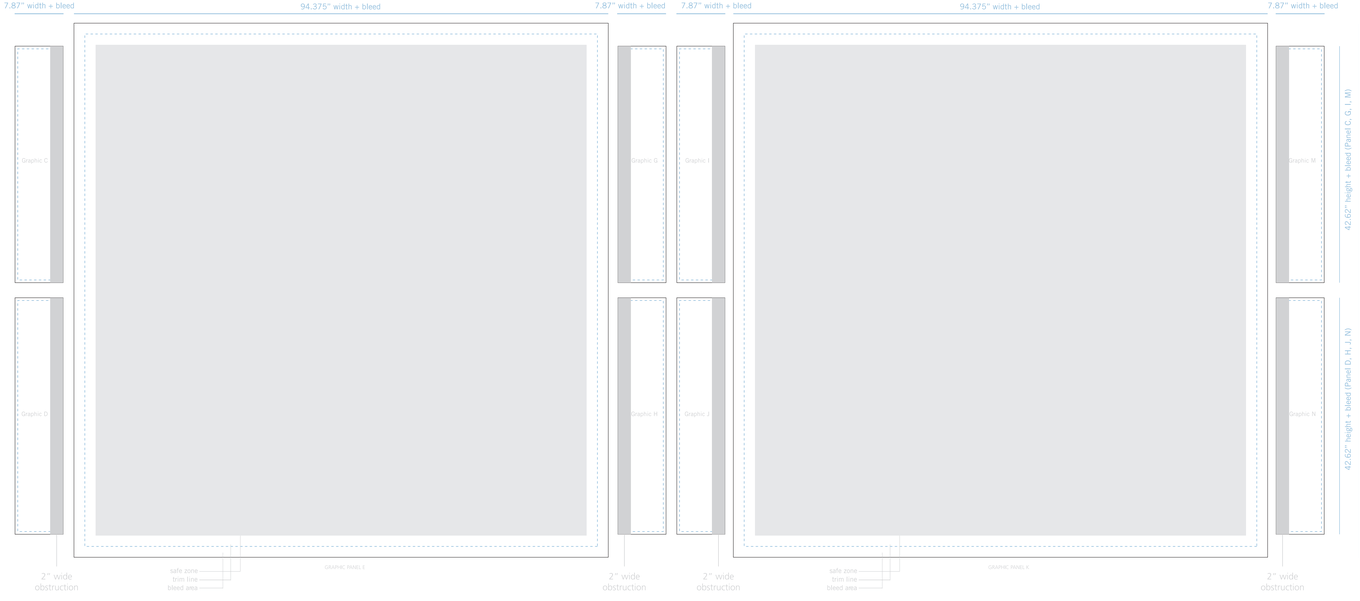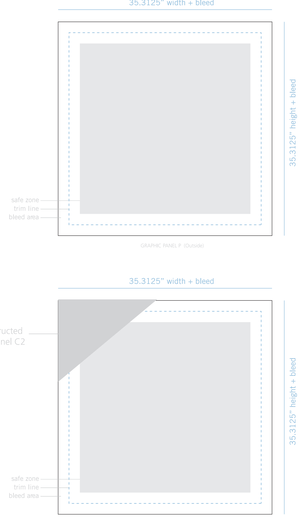
General Artwork Guidelines
- cmyk color mode
- do not embed images, supply them
- resolution must be 100-120ppi
- all fonts must be created to outlines
- do not design any critical elements
  near the extrusions